


The Innovex **Pocket Plug® Completion System** answers the call for operational efficiency and reducing the overall cost of well ownership. The Pocket Plug® Completion System overcomes the limitations of current conventional plug offerings with disruptive improvements in isolation performance, wireline pump-down speeds, wellbore debris, and costly coil interventions resulting from preset plugs and screenouts.

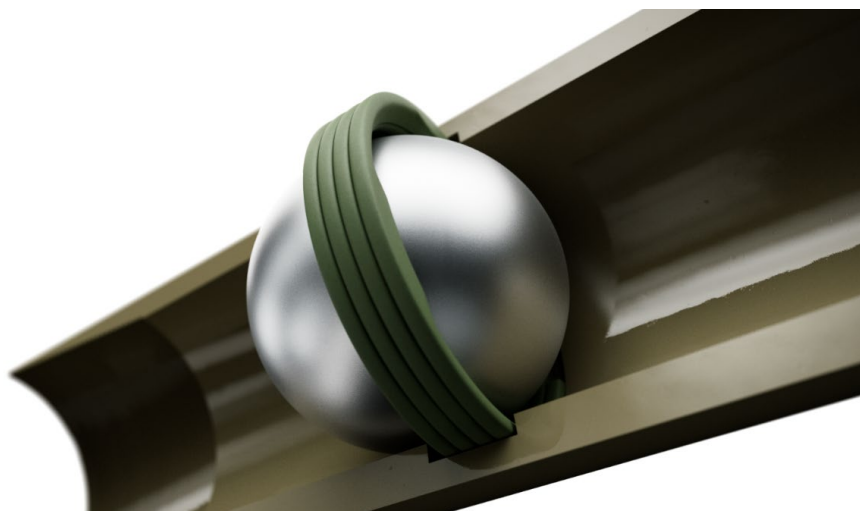

FEATURES AND BENEFITS

Less than 1" in size vs the conventional 18"-24".

Absolute Isolation utilizing a metal-to-metal seal.

Eliminates plug mill-outs.

Largest flow through ID; 4.8" in 6" Casing.

Enables extended reach frac.

Mitigates preset risk with no moving parts.

Reduces wireline pump-down time and fluid use.

Minimizes wellbore debris and non-productive time.

Expedites commodity to market with frac to production
< 24 Hours.

SPECIFICATIONS

Casing Size (in): **4.5", 5.5", and 6.0"**

Temperature (°F): **400 °F**

Pressure Rating (psi): **Up to 12,000 psi**

Run in Speed (ft/min): **Unlimited**

Flow through ID:

- **3.5" in 4.5" Casing**
- **4.5" in 5.5" Casing**
- **4.8" in 6.0" Casing**