
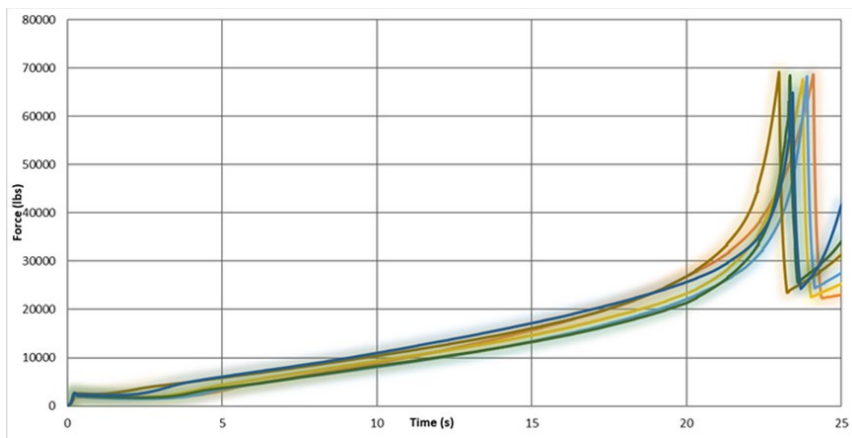


Innovex **SureFIRE™ Power Charges** have been engineered to provide dependable initiation, reliable setting, and consistent burn times for all oil and gas operations that require a downhole setting tool.

Featuring a powerful, ‘full coverage booster’ that extends the entire diameter of the housing, the Innovex SureFIRE™ Power Charge provides a dynamic ignition, eliminating the need for a secondary ignitor, resulting in cost savings. The full coverage booster also ensures proper alignment within the setting tool and a consistent, even burn.

The combustible outer shell burns completely, resulting in easy cleanup and less NPT for the crew. Innovex’s proprietary energetic blend ensures repeatable burn times and pressure ignition, converting to a stable, solid form that withstands temperatures up to 400°F. The unique mix provides ample force to completely set plugs and shear tools without worry of a stuck BHA.

Innovex SureFIRE™ Power Charges are carefully quality-tested to ensure consistent assembly and a uniform energetic blend, resulting in accurate burn times and pressure delivery with each power charge entering the field.

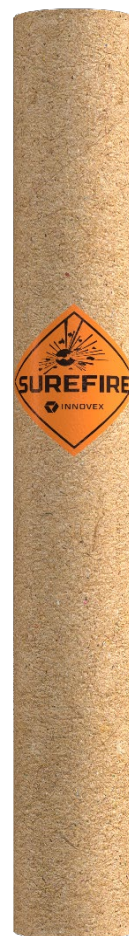

←
Shear Event
#20 Standard
Setting Tool
@65,000 lb. Shear

FEATURES AND PERFORMANCE

Powerful, full coverage booster.

No secondary ignitor required.

Proprietary energetic blend yields repeatable burn times and pressure generation.

Combustible shell for easy clean up.

Reliable ignition and plug setting.

Accurate burn rates and pressure delivery.

Setting Tool	#20 Standard
Temperature Rating	400°F 1 Hr.
Maximum Shear	Tested 65,000 lbs.
Hazard Class	1.4 C