

Innovex Power Charges have been engineered to provide dependable initiation, reliable setting and consistent burn times for all oil and gas operations requiring a downhole setting tool.

Featuring a 'full coverage booster' that extends the entire diameter of the housing, the Innovex Power Charge provides a dynamic ignition eliminating the need for a secondary ignitor resulting in cost savings. The full coverage booster also ensures proper alignment within the setting tool and a consistent, even burn. The combustible outer shell burns completely resulting in easy cleanup and less NPT for the crew.

Features

- Powerful, Full Coverage Booster
- No Secondary Ignitor Required
- Proprietary energetic blend yields repeatable burn times and pressure generation
- Combustible shell for easy clean up

Innovex's proprietary energetic blend secures repeatable burn times and pressure ignition and coverts to a stable, solid form that withstands high temperatures (up to 400 F).

The unique mix provides ample force to completely set plugs and shear tools without worry of a stuck BHA.


Innovex Power Charges are quality tested to ensure consistent assembly and a uniform energetic blend resulting in accurate burn times and pressure delivery with each power charge entering the field.

Performance

- Reliable ignition and plug setting
- Accurate burn rates and pressure delivery



Setting Tool	#20 Standard
Temperature Rating	400 F 1 Hr.
Maximum Shear	Tested 65,000 lbs
Hazard Class	1.4 C

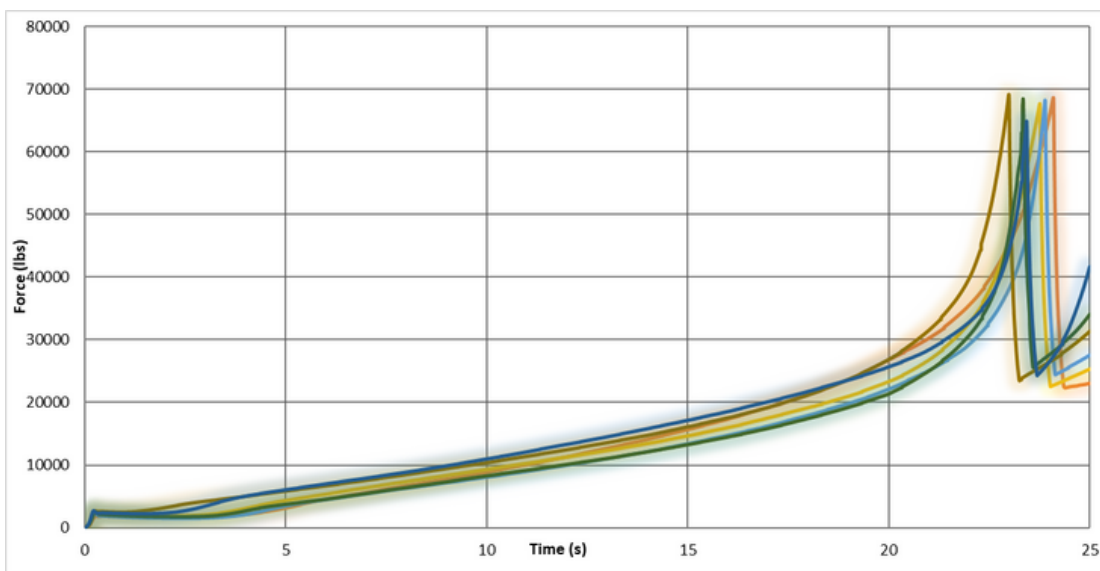

← Shear Event

#20 Standard Setting Tool @ 65,000 lb Shear