

Upper Completions

10.750 x 3.500 Crest III Packer

Technical Unit: TU1016

REVISION: 2022 Aug
August 9, 2022

Table of Contents

A. INTRODUCTION.....	3
B. SPECIFICATIONS.....	3
C. OPERATIONAL PROCEDURES	4
C-1 – Setting Procedures.....	4
C-2 – Releasing Procedures	4
C-3 - Assembly Instructions.....	4
C-4 - Disassembly Instructions.....	5
D. STORAGE & HANDLING GUIDELINES.....	5
E. DIMENSIONAL DATA & BILL OF MATERIALS.....	7
F. REVISION HISTORY	8

A. INTRODUCTION

The Crest III Packer is a weight set service packer for high pressure remedial work such as acidizing, fracturing, and squeeze cementing. It sets with minimal tubing manipulation and will withstand differential pressure from above or below.

A large integral fluid bypass allows the packer to be run quickly with minimal chance of swabbing off packing elements or dulling hold down slips. No rotation is required to retrieve the tool, and it equalizes via the fluid bypass with the first upward movement.

When set, a balance piston is actuated as pressure increases, exerting downward force on the inner mandrel, thus ensuring the integral fluid bypass is not pumped open. Standard equipment includes carbide tipped hold down slips, lower slips and drag blocks.

FEATURES

- High pressure service grade packer
- Large integral fluid bypass
- Straight pull to release

J-SLOT CONFIGURATIONS

- Right Hand Auto
- Left Hand Auto
- Right Hand Manual
- Left Hand Manual

B. SPECIFICATIONS

DIMENSIONAL SPECIFICATION						
CASING		TOOL				
SIZE	WEIGHT	MAX OD		MIN ID		CONNECTIONS
[in]	[#]	[in]	[mm]	[in]	[mm]	
10-3/4	32.75 – 45.5	9.688	246.08	3.000	76.20	3-1/2 EU 8 Rd Box x Pin
	45.5 – 60.7	9.450	240.03	3.000	76.20	



C. OPERATIONAL PROCEDURES

C-1 – Setting Procedures

1. Run packer to setting depth. The fluid bypass will remain open while running, to minimize swabbing of packing elements or dulling of hold down slips.
2. Pick up tubing and rotate (right or left hand, depending on J-Tracks) 1/2 turn at the packer. Slack off weight to close the bypass, set the slips, and pack off the elements. For this size 20,000 lb. should be sufficient.
3. At this time, pressure work can be performed above or below the packer. Tubing pressure will activate the hold down slips to prevent upward movement, and the balance piston will hold the mandrel down and the bypass closed.

C-2 – Releasing Procedures

1. To release the Crest Packer, simply pick up the tubing string slowly. The bypass will open immediately, causing the tubing and annulus pressures to begin to equalize, and releasing the hold down slips.
2. The packer can now be pulled from the well or re-set in another location. To move further down, the J-Track will have to be re-engaged by rotating 1/2 turn at the packer, in the opposite direction from that used to set the tool.

C-3 - Assembly Procedures

The following instructions do not list steps that are obvious to a trained tool hand, such as application of grease or being careful with seal surfaces.

CAUTION: THE TOP END OF THE MANDREL (2) MUST BE FILED SMOOTH ABOVE THE SPLIT RING GROOVE BEFORE BEGINNING.

THE SHORT LENGTH BELOW THE GROOVE IS A SEAL SURFACE.

1. Assemble balance piston (10) with O-ring (8) installed, into balance piston housing (9) and slide onto upper end of mandrel (2).
2. Install bypass seal (7) and O-ring (5) into seal retainer (6), slide onto mandrel just beyond groove at top end, then install split ring (4) into groove and screw seal retainer cap (3) onto seal retainer. Screw top (1) onto mandrel and clamp in vise.
3. Install hold down slips (15), with O-rings (18) installed, into holes in the side of hold down receptacle (12). Install hold down springs (19) into counterbores in hold down slips and retain with hold down straps (16) and hold down screws (17). Screw upper element gage (21) (left hand thread) onto receptacle and install O-rings (11 & 20) inside.
4. Screw lower element gage (25) onto element retainer (26), then slide the following items on the top end of packing mandrel (24): element retainer, packing elements (22) and element spacers (23).
5. Screw element assembly from step above into bottom end of hold down receptacle, then slide this assembly onto lower end of mandrel and screw into balance piston housing.

CAUTION: BE CAREFUL TO TIGHTEN THIS THREAD WITH THE BALANCE PISTON HOUSING IN VISE, NOT THE MANDREL.

6. Assemble drag blocks (34) and drag block springs (35) into control body (33) and retain with drag block retainer (36).
7. Assemble lower slips (30), with slips springs (32) attached with slip spring screws (31), into windows in control body. Screw cone extension (29) into cone (27) and slide assembly into upper end of control body and inside slips.
8. Screw control body cap (28) onto control body, then slide this slip/drag block assembly onto lower end of mandrel and screw cone into element retainer.
9. Screw J-slot bottom sub (42), with O-ring (41) installed, onto lower end of mandrel. Install control lugs (40) through holes in control body and into J-Tracks and lock in place with two set screws (39). Slide on control lug retainer (37) and screw on control body nut (38).
10. Tighten all threads and install two set screws (39) in bottom sub.

C-4 - Disassembly Procedures

NOTE: The following steps will break packer into sub-assemblies. Refer to assembly instructions to disassemble sub-assemblies, noting the left-hand threads indicated on drawing.

1. With top sub (1) in vise, unscrew control body nut (38) from control body (33), slide off control lug retainer (37), and remove two set screws (39) from control body. Then remove control lugs (40). Remove two set screws (39) from J-slot bottom sub (42), then unscrew sub from mandrel (2) and set aside.
2. Unscrew control body cap (28) from control body and slide control body off bottom end of tool. Lower slips (30) will fall inside control body at this time.
3. Unscrew cone (27) from element retainer (26) and remove. With pin through holes in element retainer and slots in packing sleeve (24), unscrew packing sleeve from hold down receptacle and slide off packing elements (22), element spacers (23) and element retainer.
4. Break mandrel out of top sub then, with balance piston housing (9) in vise, break off hold down receptacle and slide off bottom end of mandrel.
5. Unscrew seal retainer cap (3) from seal retainer (6) and remove. Then remove split ring (4), seal retainer and balance piston housing. Remove balance piston from housing.
6. Unscrew top gage (13) and upper element gage (21) (left hand thread) from hold down receptacle, then slide off both strap retainers (14).
7. Remove hold down screws (17), then hold down straps (16), hold down springs (19) and hold down slips (15) from hold down receptacle.
8. Slide drag block retainer (36) from control body, freeing drag blocks (34) and drag block springs (35).

D. STORAGE & HANDLING GUIDELINES


All Upper Completions products from Innovex should at all times be stored in a manner which prevents exposure to natural elements: wind, water, excessive temperatures (hot or cold), and stored in a clean environment to prevent contamination by elements which might adversely affect proper function (i.e. sand, loose soil, dust).

- Storage temperature should remain below 80°F for any packers with elastomeric components (O-rings, packing elements, etc.) installed.
- Storage location for any packers with elastomeric components installed should have no direct exposure to sunlight. Packing elements should be shielded from ultraviolet light by covering in a protective material.

- Store in a dry area, no rain, seawater, or condensation.

Prior to storage, the packer should be assembled with internal thread connections made-up hand tight. Handle and store the tool in the running position with the lugs in the appropriate j-slot section which prevents undesired compression and deformation of packing elements. Store the tool in a manner which prevents undesired stresses on dynamic components such as Slips, Drag Block, and Sleeves.

E. DIMENSIONAL DATA & BILL OF MATERIALS

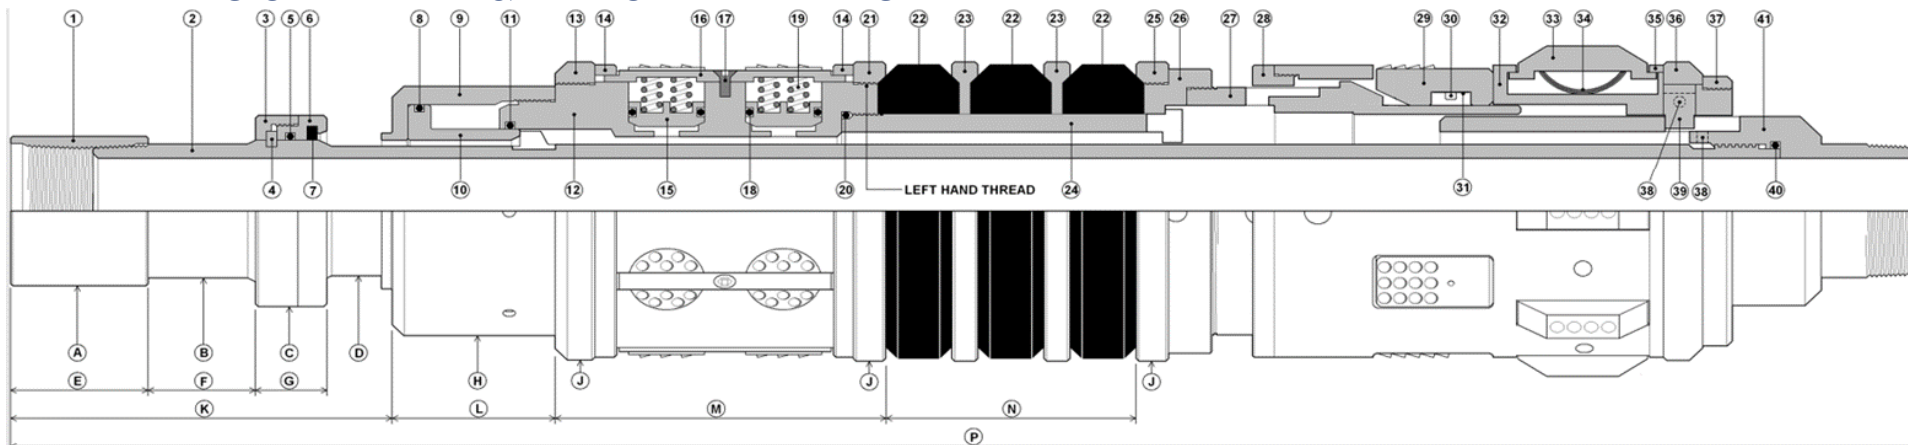

PART NUMBERS

KEY #	QTY	PART #	NAME	KEY#	QTY	PART #	NAME	KEY#	QTY	PART#	NAME
1	1	1G2G2P	TOP SUB	15	14	SEE CHARTS	HOLD DOWN SLIP	29	12	70520	CONE EXTENSION
2	1	40600	MANDREL	16	7	64490	HOLD DOWN STRAP	30	6	100CT	LOWER SLIP
3	1	40620	SEAL RETAINER CAP	17	7	11458C	HOLD DOWN SCREW	31	6	11236C	SLIP SPRING SCREW
4	1	40660	SPLIT RING	18	14	19230	O-RING	32	12	51789	LOWER SLIP SPRING
5	1	19345	O-RING	19	28	50409	HOLD DOWN SPRING	33	1	70540	CONTROL BODY
6	1	40670	SEAL RETAINER	20	1	19355	O-RING	34	8	SEE CHARTS	DRAG BLOCK
7	1	31240	BYPASS SEAL	21	1	SEE CHARTS	UPPER ELEMENT GAGE	35	48	50110	DRAG BLOCK SPRING
8	1	19358	O-RING	22	3	603-10-51X *	PACKING ELEMENT	36	1	70570	DRAG BLOCK RETAINER
9	1	60820	BALANCE PISTON HOUSING	23	2	SEE CHARTS	ELEMENT SPACER	37	1	SEE CHARTS	CONTROL LUG RETAINER
10	1	60810	BALANCE PISTON	24	1	40630-K	PACKING SLEEVE	38	1	70580	CONTROL BODY NUT
11	1	19350	O-RING	25	1	SEE CHARTS	LOWER ELEMENT GAGE	39	4	11168C	SET SCREW
12	1	40680	HOLD DOWN RECEPTACLE	26	1	70500	ELEMENT RETAINER	40	2	64000	CONTROL LUG
13	1	SEE CHARTS	TOP GAGE	27	1	70510	CONE	41	1	19341	O-RING
14	2	40690	STRAP RETAINER	28	1	70530	CONTROL BODY CAP	42	1	SEE CHARTS	J-SLOT BOTTOM SUB

* REPLACE THE X IN PART NUMBER WITH DUROMETER: 0 FOR 60, 1 FOR 70, 2 FOR 80, OR 3 FOR 90.

DRESSING CHART		
ITEM	32.75 - 45.5	45.5 - 60.7#
TOP GAGE	70593	70594
HOLD DOWN SLIP	50403	50402
UPPER ELEMENT GAGE	70443	70444
ELEMENT SPACER	70483	70484
LOWER ELEMENT GAGE	70493	70494
DRAG BLOCK	50960	50950
CONTROL LUG RETAINER	70562	70563

CONTROL BODY SELECTION CHART	
J-TRACK CONFIGURATION	PART NUMBER
RIGHT HAND MANUAL	40612
LEFT HAND MANUAL	40611

FLUID BYPASS AREA: 2.28 SQ. IN.
 AFFECTED AREA OF BALANCE PISTON: 11.5 SQ. IN.

DIMENSIONS (IN.)													
A	B	C	D	E	F	G	H	J	K*	L	M	N	P
4.50	3.75	1.75	3.62	5.75	3.81	2.50	7.00	SEE SPECIFICATIONS	14.38	5.75	10.78	8.88	67.38

*WITH PACKER IN POSITION SHOWN

F. REVISION HISTORY

DATE	REVISION	DESCRIPTION OF CHANGES	REVISED BY	CHECKED BY
		NEW RELEASE		
08/09/2022	2022 Aug	Updated Format	N. Alexander	